






## PRODUCT MANUAL

### RED DOT DIMENSIONS

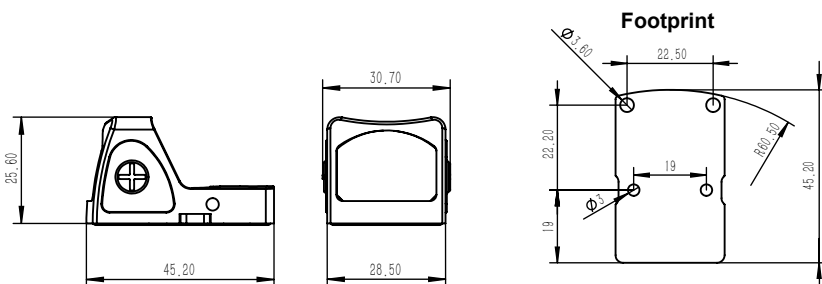

#### Included in the Box

- Picatinny mount
- Glock mount
- Allen wrench (2mm)
- Allen wrench (2.5mm)
- Transparent dust cover
- Lens cloth

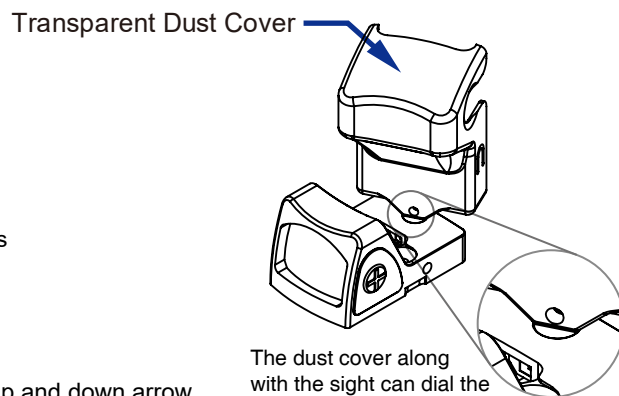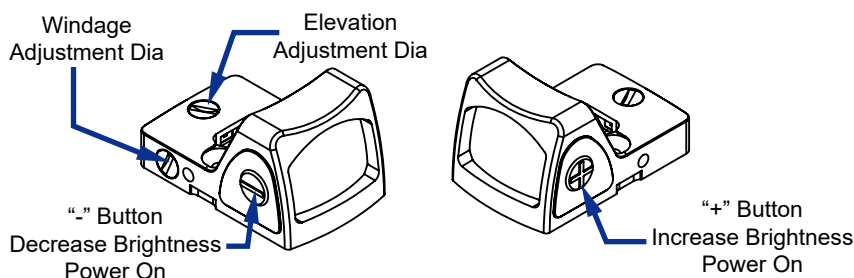

### Powering Up

To turn the device on, press either the up or down arrow. To turn off, press both up and down arrow at same time, the LED will blinking three times and power off.


### Brightness Adjustment

The red dot provides 19 levels of brightness adjustment. Pressing the "+" or "-" button can adjust the illumination intensity. Press or hold the "+" button ("-") button) to increase (decrease) the brightness. The LED blinks one time once each brightness level changed. The LED doesn't blink if the device reaches the maximum (minimum) level of brightness.

### Auto-Off

The device will automatically power off after 3-hour inactivity of any button for saving battery. The LED keeps blinking one time per second for 15 minutes before power off. Pressing any button can cancel this auto-off. Device will saves your last brightness setting before power off. It can automatically adjust the brightness to the last-saved level when power on again.

CR2032  
Button Cell Battery  
(+) facing outward



## SPECS

Length x Width x Height	45.2 x 30.7 x 25.6 mm (1.78 x 1.21 x 1 inch)
Day Reticle Color	Red
Illumination Source	LED
Adjustment	1.5 MOA Per Click
Shock Proof	Acceleration 1000 G With 3.8 Hz and 10 times
Housing Material	6061-T6 Aluminum
Weight (Gram) (Ounce)	65 g (2.3 oz.)
Power Source	1x CR2032

Magnification Stated	1x
Exit Pupil Dia.	17 x 24 mm
Parallax Setting	100 yds
Eye Relief	Unlimited
Windage Elevation (Up Down)	30 MOA-30 MOA
Windage Elevation (Right Left)	30 MOA-30 MOA
Type Of Reticle	2 MOA Dot
Lens Coating	Fully Multicoated